

**Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S, HPS-DAK, HPS-DAK/S  
Manual Non-Coded Pull Station**



**HPS-SAH**



**HPS-SAK**



**HPS-DAH**



**HPS-DAH/S**



**HPS-DAK**



**HPS-DAK/S**

**STANDARD FEATURES**

- Metal Construction
- Enclosed switch with glass rod (included)
- 10 Amps @ 120 VAC
- Available in: Single Action, Dual Action and Dual Action in Spanish (HPS-DAH/S)
- UL, CSFM Listed
- Made in USA

**DESCRIPTION**

Hochiki America's Models HPS series pull stations are available in six models:

- HPS-SAH - single action with Hex lock
- HPS-SAK - single action with Key lock
- HPS-DAH - dual action with Hex lock
- HPS-DAH/S - dual action with Hex lock (Spanish)
- HPS-DAK - dual action with Key lock
- HPS-DAK/S - dual action with Key lock (Spanish)

Each model is constructed of a solid die cast housing and comes in glossy red. The back switch plate is plated steel. The electrical switch is rated for 10 Amps @ 120 VDC normally open contact rating. All models are connected via terminal block connections.

**PRODUCT LISTINGS**

**SIGNALING**



California State  
Fire Marshal  
7150-0410:162


*Specifications subject to change without notice.*

*Continued on back.*




**Series HPS-SAH, HPS-SAK, HPS-DAH, HPS-DAH/S, HPS-DAK, HPS-DAK/S  
Manual Non-Coded Pull Station**

**Rear View**

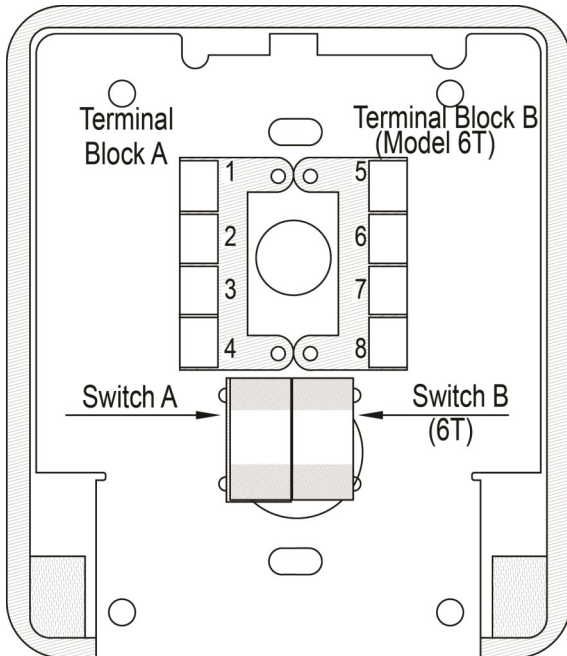

**Front View**

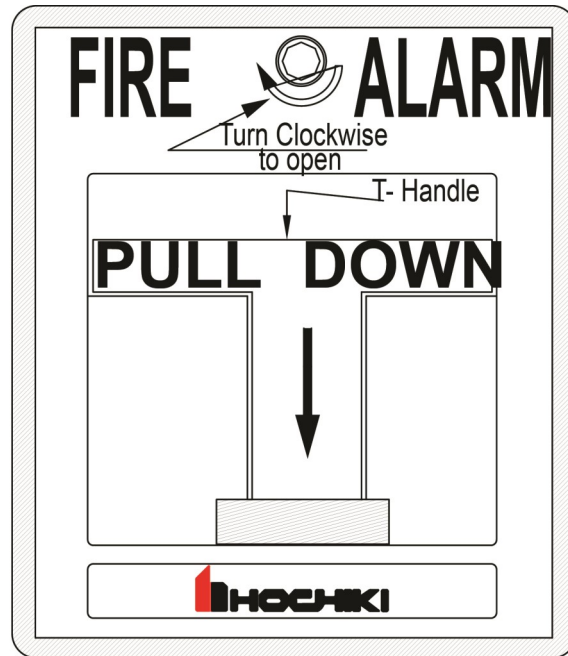

**SPECIFICATION**

<b>Model</b>	SAH, SAK, DAH, DAH/S, DAK, DAK/S	EXP./WTP. PRF
<b>Contact</b>	SPST Form "A"	DPDT Form "C"
<b>Terminal Block</b>	A	A & B
<b>Terminal Connecting</b>	2 & 3	1, 2, 3, 5, 6, 7
<b>Terminal Connection LED</b>	1 (+) & 4 (-)	4 (+) & 8(-)
<b>Terminal Connection Switch</b>	1 & 4	4 & 8
<b>Terminal Connection Phone Jack</b>	1 & 4	4 & 8
<b>Contact Rating</b>	10A @ 120 VAC	10A @ 120 VAC
<b>Operating Temperature</b>	-30°F (-35°C) ~ 150°F (66°C)	-30°F (-35°C) ~ 150°F (66°C)
<b>Dimensions</b>	HPS-SAH_SAK	3.2"W x 4.75"H x .875"D
	HPS-DAH_DAH-S	3.325"W x 4.75"H x 1.625"D
	HPS-DAK_DAK-S	3.325"W x 4.75"H x 1.625"D

**ELECTRICAL WIRING**

